

**HIGH PERFORMANCE  
FASTER  
READ/WRITE SPEEDS  
GIGABIT CONNECTIVITY**



## 2-BAY NETWORK STORAGE ENCLOSURE

### **ADD SATA DRIVES WITH EASE<sup>1</sup>**

Insert up to two internal 3.5" SATA hard drives without using any tools or attaching any cables

### **BACK UP AND PROTECT FILES**

Protect your important files by making regular backups to mirrored hard drives using RAID 1 technology<sup>1</sup>

### **BUILT-IN FTP SERVER<sup>2</sup>**

Access stored files over the Internet

### **SAFELY SHARE DIGITAL FILES LOCALLY AND OVER THE INTERNET**

The D-Link DNS-323 2-Bay Network Storage Enclosure, when used with internal SATA drives, enables you to share documents, files, and digital media such as music, photos, and video with everyone on the home or office network. Remotely accessing files through the Internet is also possible with the built-in FTP server<sup>2</sup>. Whether you are allowing access locally or over the Internet, keep data safe by only giving rights to specific users or groups. When configuring the DNS-323, you can create users and groups and assign them to folders with either read or read/write permissions. This is ideal for an office environment with employee-specific sensitive data or for the home where you can ensure your children will only have access to age appropriate material.

### **STREAM DIGITAL MEDIA CONTENT TO UPnP™ AV COMPATIBLE MEDIA PLAYERS**

Back up your music, photo, and video collections to the DNS-323 for safekeeping. Then, enjoy the benefits of the built-in UPnP AV media server as you stream digital content to compatible media players (such as those found in D-Link's MediaLounge™ product line). This feature is highly convenient as it allows you to turn off a computer that would normally be needed for the same function.

### **PROTECTION, PERFORMANCE, AND FLEXIBILITY**


The availability of four different hard drive modes (Standard, JBOD, RAID 0, RAID1) allows you to choose the configuration best suited to your needs. Standard mode creates two separately accessible hard drives. JBOD combines both drives in linear fashion for maximum space efficiency. RAID 0 combines both drives in a 'striped' configuration, which provides the highest performance, enabling speeds up to 23MBps-Read and 15MBps-Write (184Mbps-Read and 120Mbps-Write) when using a Gigabit Ethernet connection<sup>3</sup>. RAID 1 causes the drives to mirror each other, providing maximum protection. If one drive fails while configured as RAID 1, the unaffected drive continues to function as a single drive until the failed drive is replaced. The new drive will then be remirrored, allowing the DNS-323 to return to its full protection.

### WHAT THIS PRODUCT DOES

The D-Link DNS-323 2-Bay Network Storage Enclosure, when used with internal SATA drives<sup>1</sup>, enables you to share your documents, music, photos, and videos across the network and on the Internet so family members, friends, or employees can access them. This enclosure also allows you to create a central network point for backing up valuable files and the built-in RAID 1 mirroring technology protects these files from drive failure. You can also use this device to stream music, photos, and videos to UPnP™ AV compatible network media players<sup>4</sup>.


### ROBUST SOFTWARE INCLUDED

The included CD contains D-Link's Easy Search Utility. This utility allows you to easily locate the DNS-323 anywhere on the network. Once located, use the utility to map the hard drive(s) so they will appear in My Computer on your PC. Backup software is also included on the CD. This will allow the back up of valuable files from a computer to the DNS-323 manually, by a schedule, or in real-time. Real-time backups are a great way to safeguard against unfortunate accidents that may result in the loss of precious files.

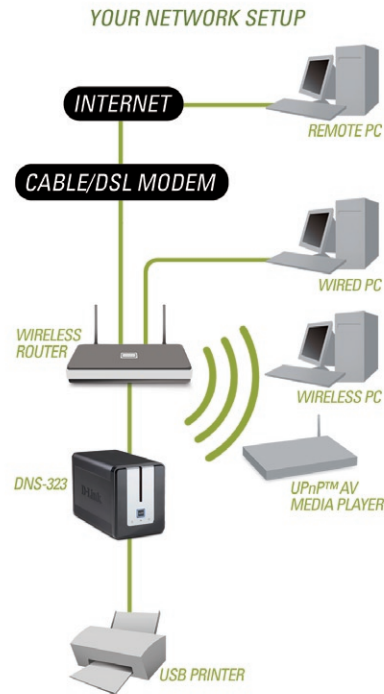

### MIRRORING HARD DRIVES WITH RAID 1 TECHNOLOGY

Backing up to a regular hard drive offers a basic level of protection. But what if that hard drive fails? Using the DNS-323 with two internal SATA drives and RAID 1 technology, you can mirror between the two drives (i.e. duplicate data on both drives), ensuring maximum protection of valuable data. If one drive fails, the other continues to function as a single drive until the failed drive is replaced.

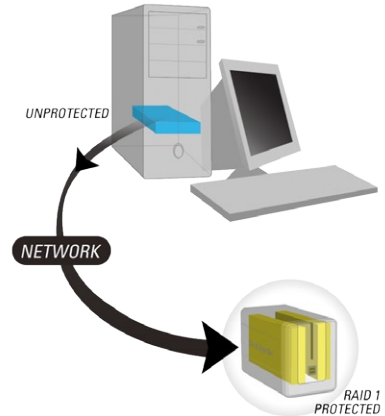

### TECHNICAL SPECIFICATIONS

#### STANDARDS

- + IEEE 802.3 + IEEE 802.3u
- + IEEE 802.3ab

#### SUPPORTED HARD DRIVE TYPE

- + SATA –Any Capacity
- + 3.5" Internal

#### PORTS

- + 1 10/100/1000 Gigabit Ethernet Port
- + 1 USB Print Server Port
- + Power

#### DRIVE MANAGEMENT

- + Four Different Hard Drive Configurations
- + Scandisk
- + E-Mail Alerts
- + Defrag
- + Power Management

#### DEVICE MANAGEMENT

- + Internet Explorer v6 or other Java-enabled browser

#### LED

- + Power + LAN
- + HDD 1 + HDD 2

#### OPERATING TEMPERATURE

- + Operating: 32° - 131° F
- + Storage: -4° - 158° F

#### OPERATING HUMIDITY

- + Humidity 5% ~ 90% (Non-condensing)

#### DIMENSIONS

- + Item (W x D x H) 4.1" x 7.8" x 5.2"
- + Packaging (W x D x H) 8.1" x 10.9" x 7.2"

#### WEIGHT

- + Item: 2.7lbs
- + Packaging: 5.1lbs

#### WARRANTY

- + 1-Year Limited Warranty<sup>5</sup>

<sup>1</sup>Hard Drive(s) not included. An internal SATA drive is required to store or share files. RAID 1 mirroring requires the use of two (2) internal SATA drives. To avoid data incompatibility in RAID 1 operation, use SATA drives from the same manufacturer. Formatted drive capacity for RAID 1 operation is dependent on the drive capacity of the lowest-sized drive. May not work with older generation SATA drives. For a list of SATA drives that have been tested to work with the DNS-323, visit [www.support.dlink.com](http://www.support.dlink.com).

<sup>2</sup>Note that use of an FTP Server to access files over the Internet does not provide for secure or encrypted transmissions. It is recommended that the end-user utilize a Virtual Private Network (VPN) to establish a secure FTP session.

<sup>3</sup>Speed results will vary depending on the benchmark utility, hard drive configuration, and the network environment used for testing.

<sup>4</sup>D-Link cannot guarantee full compatibility or proper playback with all codecs. Playback capability depends on the codec support of the UPnP™ AV media player.

<sup>5</sup>1-Year Limited Warranty available only in the USA and Canada.

<sup>6</sup>Latest software and documentation available at <http://support.dlink.com>.

Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

## STORAGE

#### MINIMUM SYSTEM REQUIREMENTS

- + Computer with:
  - 1GHz processor/512MB RAM/200MB of available space
  - Windows® XP SP2 or Windows 2000 SP4
  - CD-ROM Drive to view Product Documentation and Install Software

#### PACKAGE CONTENTS

- + 2-Bay Network Storage Enclosure
- + Power Adapter
- + Ethernet Cable
- + Power Cable Clip
- + Installation Guide
- + CD-ROM<sup>6</sup> with:
  - Software
  - Product Documentation

D-Link Systems, Inc. 17595 Mt. Herrmann Street, Fountain Valley, CA 92708  
 ©2006 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link and the D-Link logo are registered trademarks of D-Link Corporation or its subsidiaries in the United States and other countries. Other trademarks or registered trademarks are the property of their respective owners. Visit [www.dlink.com](http://www.dlink.com) for more details.